Fractal Cloud T5 Fluorescent
Installation Guide

luxxbox

240v Power Cord

3 — Adjust Height

1. Before mounting select appropriate height for hanging Fractal Cloud and trim power cable to suit

2. Terminate cables within the T5 Batten and run power cable through power cable hole in backing plate.

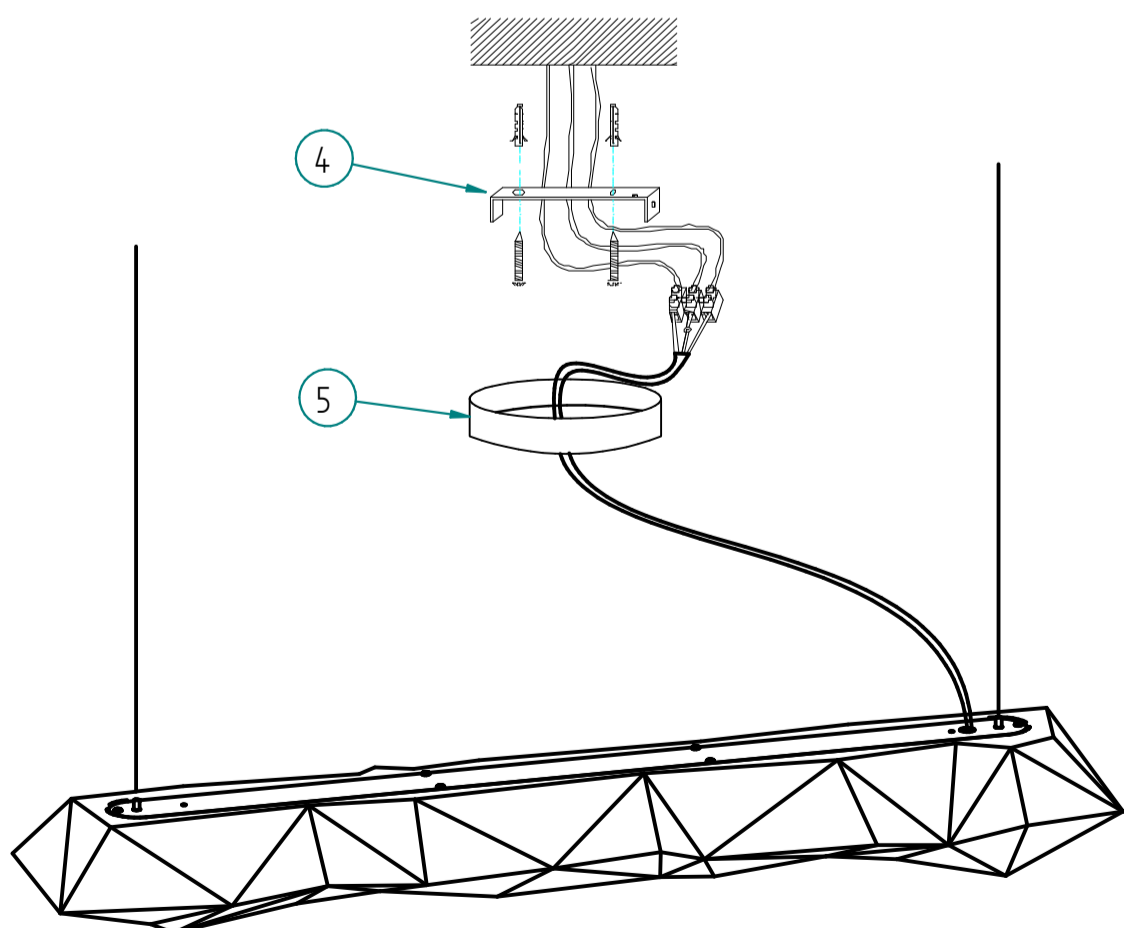Note: Dimmable version requires the connection of two extra poles.
D1 - White Strip
D2 - Black Strip

3. Screw T5 Batten and Backing plate assembly to Fractal Cloud diffuser with the 6xM5 button head screws

240v Power Cable

6 x M5 Button Head Screws

1

2

Backing Plate

T5 Batten

Fractal Cloud Diffuser
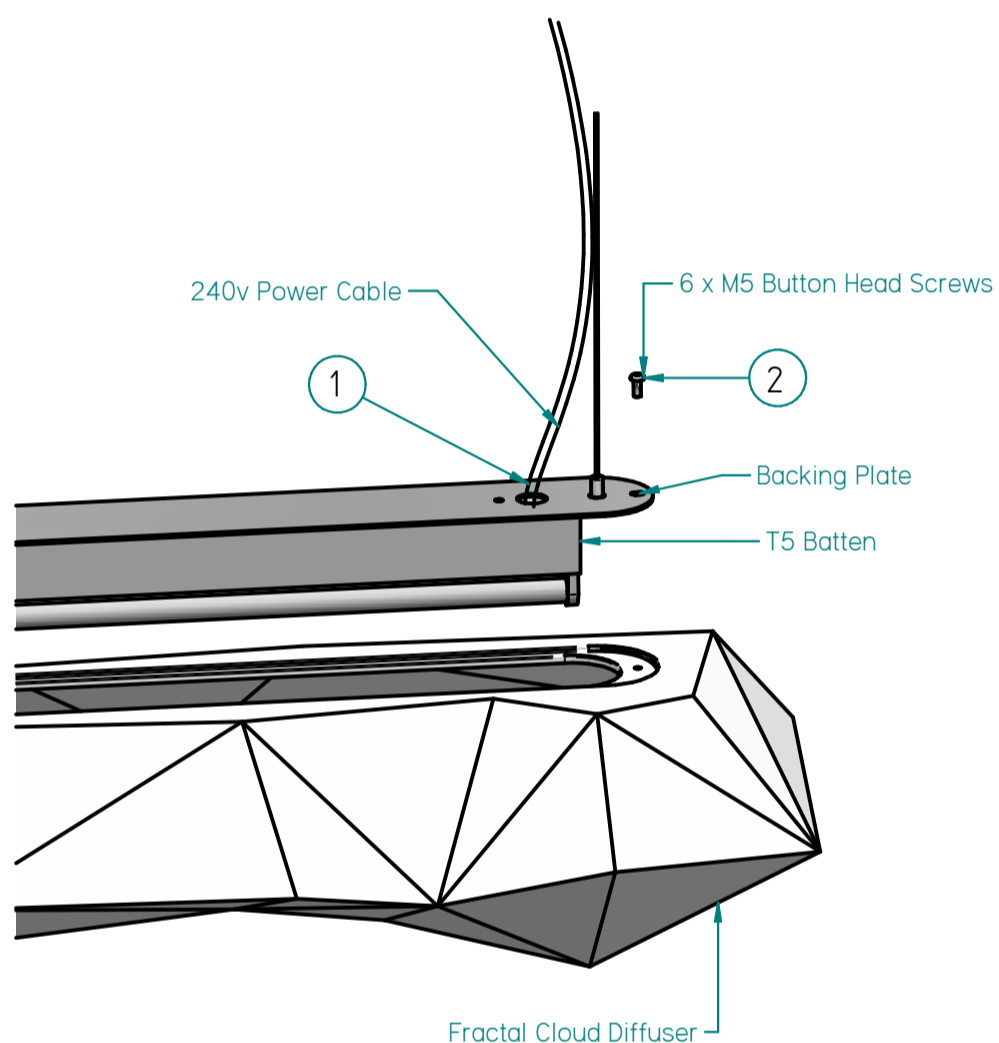
4. Position ceiling canopy bracket and mount to ceiling

4
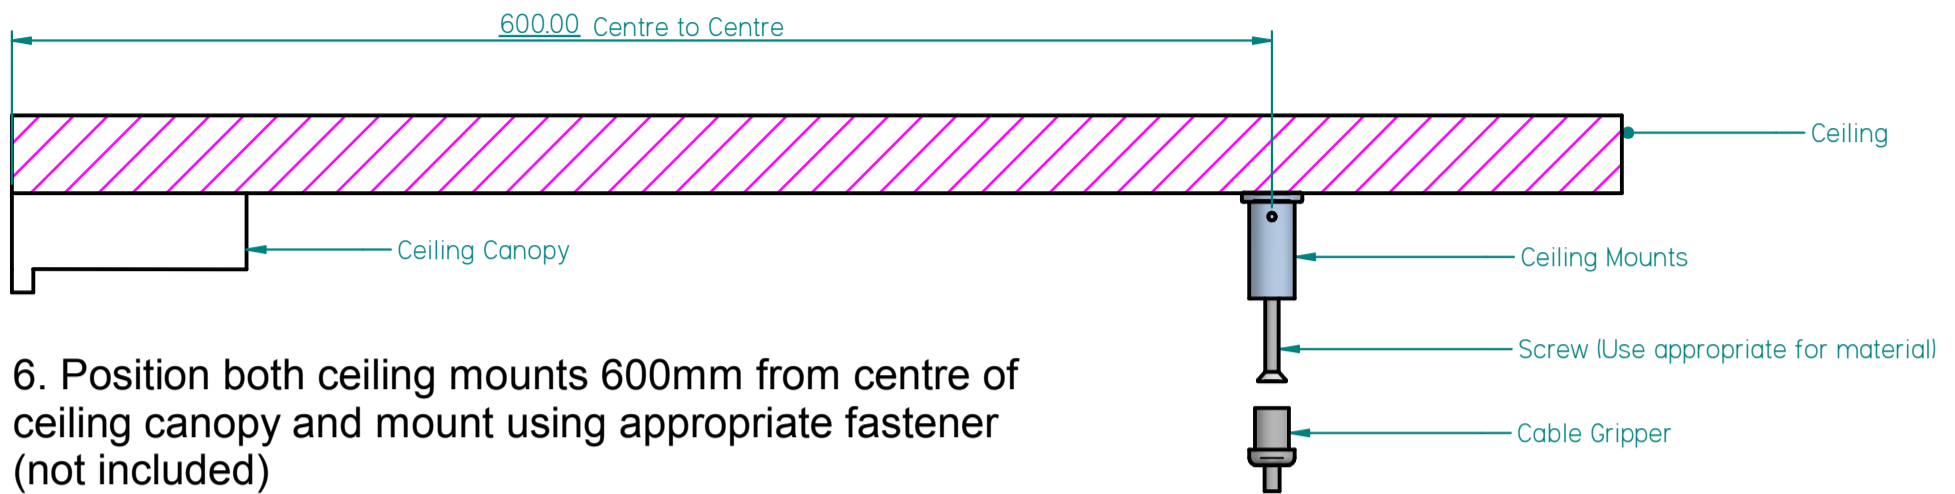
5

5. Attach ceiling canopy cover to ceiling mount bracket

Fractal Cloud T5 Fluorescent
Installation Guide

luxxbox

600.00 Centre to Centre

Ceiling

Ceiling Canopy

Ceiling Mounts

Screw (Use appropriate for material)

Cable Gripper

6. Position both ceiling mounts 600mm from centre of ceiling canopy and mount using appropriate fastener (not included)

9

Ceiling Rose

7

Cable Gripper

8
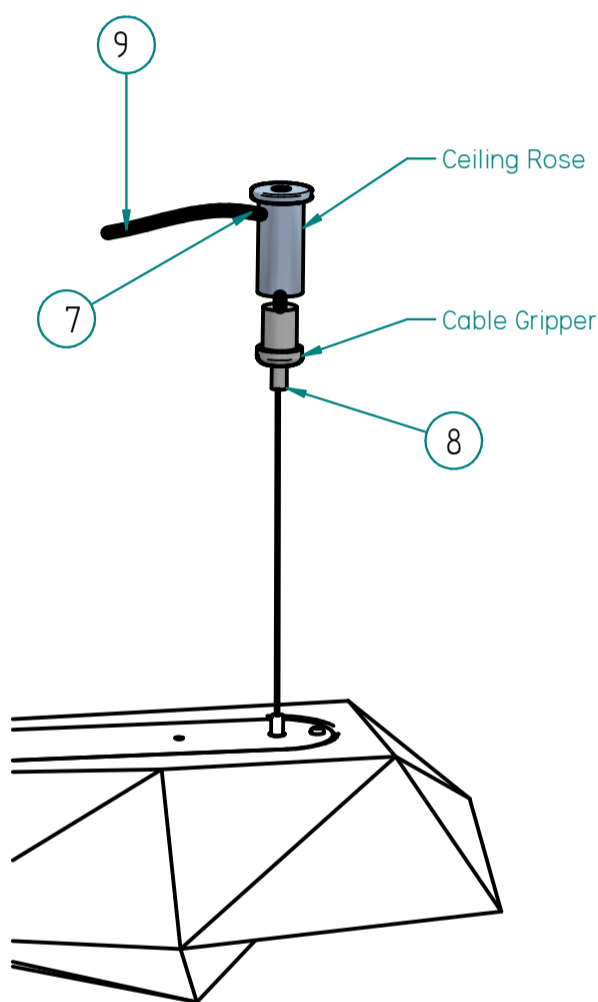
7. Screw cable gripper into ceiling mount. Feed the cable into cable gripper and out through hole in side of mount

8. Level Fractal Cloud. Adjust cable height by simply pulling the cable through ceiling mount to shorten or depressing the spring loaded cable gripper to lengthen

9. Trim cable once level leaving approximately 50mm excess

10. Enjoy!!!
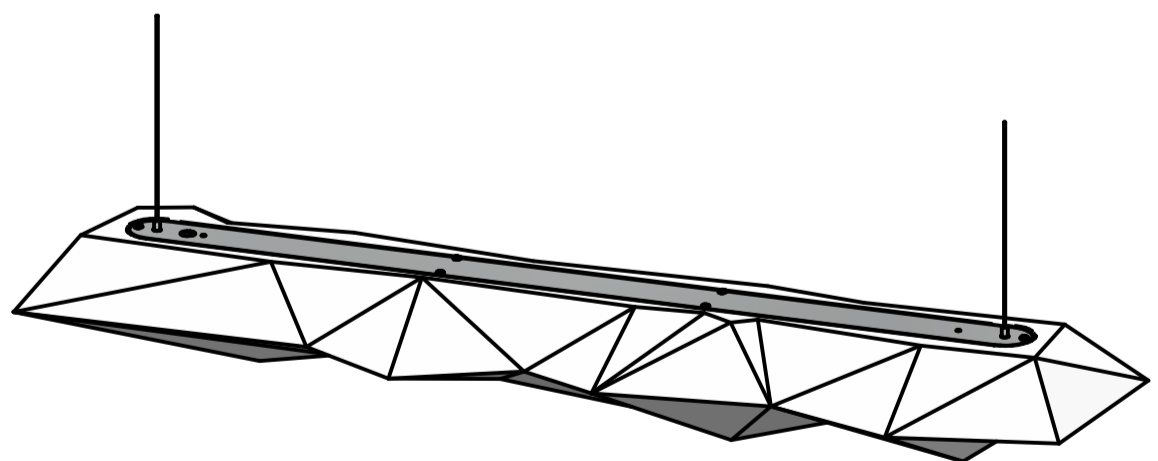
Fluorescent Tube Options

28W 1200mm T5
54W 1200mm T5

Dimmable Options

INST: Instant Start Electronic Ballast
SSEL: Soft Start Electronic Ballast
1-10V: 1-10V Dimming Ballast
DIG: Digital Dimming Ballast
DALI: DALI Electronic Ballast

Line voltage must be installed by a qualified Electrician, in accordance with local ellectrical laws